


Transformer Specifications	
PRIMARY VOL TAGE(S)	208/230/460
SECONDARY VOL TAGE(S)	115
RATED V.A.	150
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	5.6 LBS


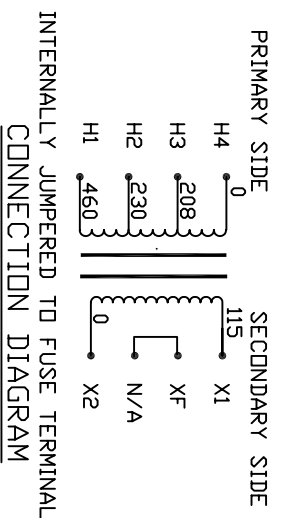


- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. 8-32 PHILLIP SCREW TRUSS SLOT
 3. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 4. ALL MEASUREMENTS IN INCHES (MM)

MAIN PRODUCT IDENTIFICATION LABEL

PRIMARY IDENTIFICATION LABEL

SECONDARY IDENTIFICATION LABEL

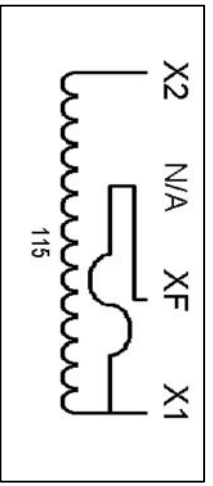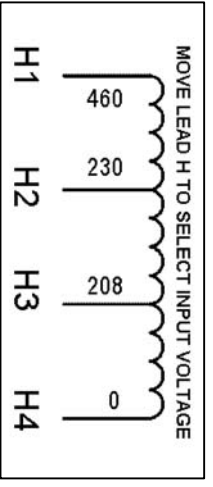

MICRON IMPERVITRAN
 U.S. PAT. NO. 3,516,040
 150VA 50/60Hz
 TEMP CL. 130°C
 CAT. NO. B150MBT13RKF
 SERIES 2
 02083

PACKAGED ACCESSORIES	
DATE	9/18/07
SCALE	1:1
SIZE	C
MODEL	B150MBT13RKF