

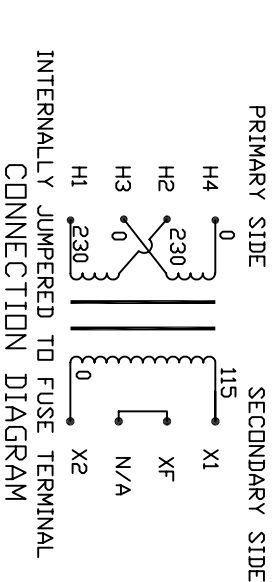
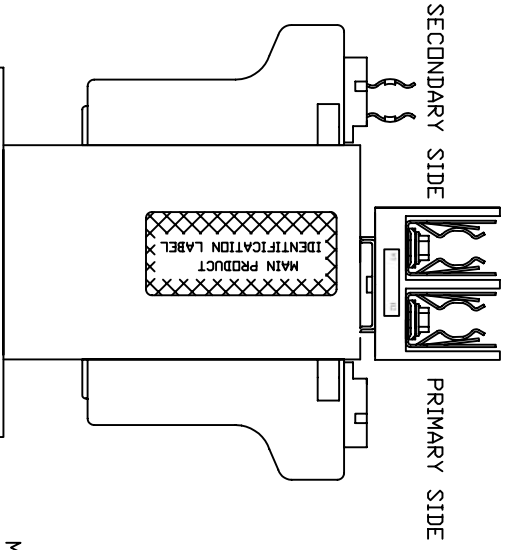
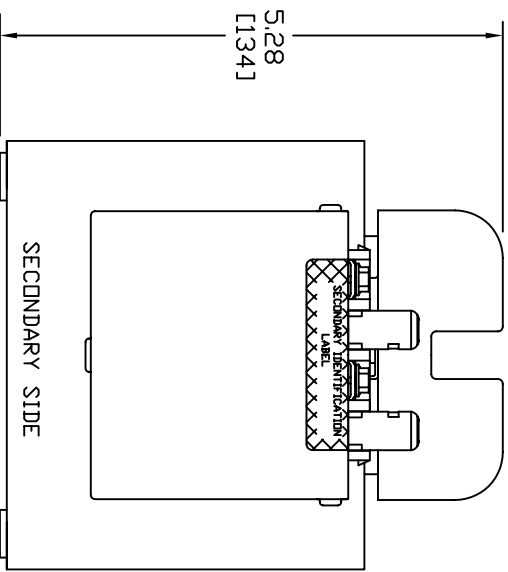
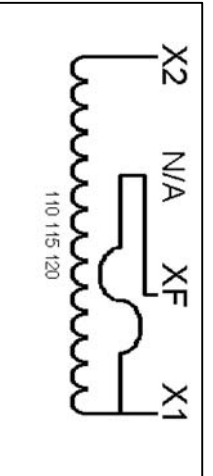


Transformer Specifications	
PRIMARY VOLTAGE(S)	230x460 (TRIPLE RATED)
SECONDARY VOLTAGE(S)	115
RATED V.A.	300
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	110 LBS

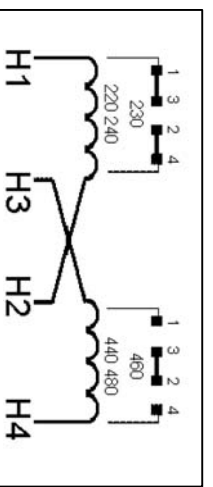

- NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
 2. FUSE CLIPS TO ACCOMMODATE 13/32-1 1/2"
 3. ALL MEASUREMENTS IN INCHES (MM)

MAIN PRODUCT IDENTIFICATION LABEL

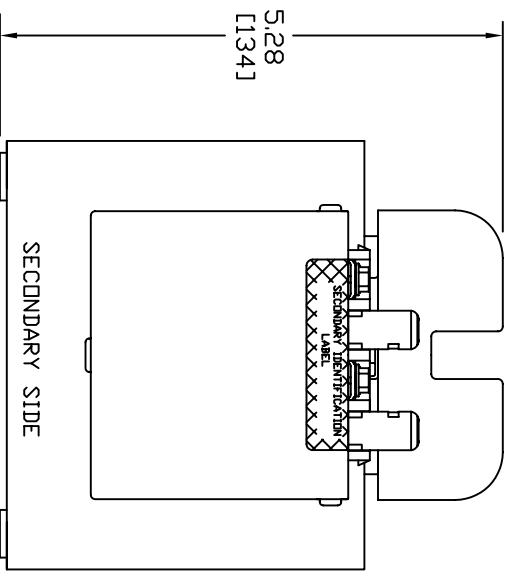

MICRON IMPERVITRAN[®]
U.S. PAT. NO. 3,516,040

300VA 50/60-Hz
TEMP CL. 130°C

CAT. NO. B300BTZ13RBF
SERIES 2

50074

UL US LISTED 702X

MICRON TRANSFORMERS
800 654-4600
WWW.MICRONTRANSFORMERS.COM

PACKAGED ACCESSORIES	DATE	REVISION	BY	CHKD	APP'D
1 1 PAIR OF JUMPERS	11/26/07	JGV			
	11/26/07				

MICRON INDUSTRIES CORPORATION
14, GORDON ROAD, ELMSFORD, NY 11735
TEL: (800)654-4600 FAX: (845)486-1800
WWW.MICRONTRANSFORMERS.COM

MICRON PART NO. B300BTZ13RBF